


ΣΥΡΟΜΕΝΟΣ ΜΗΧΑΝΙΣΜΟΣ

SP 3500 TRI 400



Control unit	SIRIO CBB	Slowdown	no
Board power supply	400 V	Locking	Mechanical
Supply voltage AC	400 V	Release	Hexagonal key
Power input	550 W	Impact reaction	Sensitive edge
Max. door/gate weight	3500 kg	Frequency of use	very intensive
Gate speed	10 m/min	Protection rating	IP54
Type of limit switch	Electromechanical	Environmental conditions	-15 ÷ 50 °C
Pinion module	6	U-Link	Yes

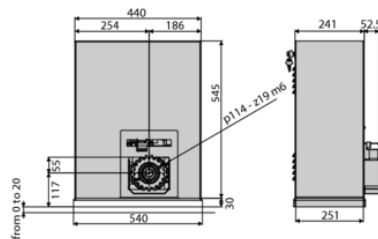